



Center for Advanced Multimodal Mobility Solutions and Education

Project ID: 2020 Project 13

A New Method for Estimating Truck Queue Length at Marine Terminal Gates

Final Report

by

Yi Qi, Ph.D., P.E. (ORCID ID: <https://orcid.org/0000-0002-6314-2626>)
Professor and Chair, Department of Transportation Studies
Texas Southern University
TECH 215B, 3100 Cleburne Ave, Houston, TX 77004
Phone: 1-713-313-6809; Email: Yi.Qi@tsu.edu

Tao Tao (ORCID ID: <https://orcid.org/0000-0002-9215-022X>)
Research Assistant, Department of Transportation Studies
Texas Southern University
TECH 259, 3100 Cleburne Ave, Houston, TX 77004
Phone: 1-713-313-1854; Email: Tao.Tao@TSU.EDU

Qun Zhao (ORCID ID: <https://orcid.org/0000-0003-3760-9234>)
Research Associate, Department of Transportation Studies
Texas Southern University
TECH 208, 3100 Cleburne Ave, Houston, TX 77004
Phone: 1-713-313-1854; Email: qun.zhao@tsu.edu

Mehdi Azimi, Ph.D., P.E. (ORCID ID: <https://orcid.org/0000-0001-5678-0323>)
Assistant Professor, Department of Transportation Studies
Texas Southern University
Phone: 1-713-313-1293; Email: Mehdi.Azimi@tsu.edu

Wenrui Qu, Ph.D. (ORCID ID: <https://orcid.org/0000-0003-4139-3544>)
Associate Professor, School of Mathematics and Statistics,
Qilu University of Technology (Shandong Academy of Sciences)
Phone:011-86-13173006561; Email: quwenrui601@163.com

for

Center for Advanced Multimodal Mobility Solutions and Education
(CMMSE @ UNC Charlotte)
The University of North Carolina at Charlotte
9201 University City Blvd
Charlotte, NC 28223

August 2021

ACKNOWLEDGEMENTS

This project was funded by the Center for Advanced Multimodal Mobility Solutions and Education (CAMMSE @ UNC Charlotte), one of the Tier I University Transportation Centers that were selected in this nationwide competition, by the Office of the Assistant Secretary for Research and Technology (OST-R), U.S. Department of Transportation (US DOT), under the FAST Act. The authors are also very grateful for all of the time and effort spent by DOT and industry professionals to provide project information that was critical for the successful completion of this study.

DISCLAIMER

The contents of this report reflect the views of the authors, who are solely responsible for the facts and the accuracy of the material and information presented herein. This document is disseminated under the sponsorship of the U.S. Department of Transportation University Transportation Centers Program [and other SPONSOR/PARTNER] in the interest of information exchange. The U.S. Government [and other SPONSOR/PARTNER] assumes no liability for the contents or use thereof. The contents do not necessarily reflect the official views of the U.S. Government [and other SPONSOR/PARTNER]. This report does not constitute a standard, specification, or regulation.

Table of Contents

EXECUTIVE SUMMARY	xii
Chapter 1. Introduction.....	14
1.1 Problem Statement	14
1.2 Objectives	16
1.3 Report Overview	16
Chapter 2. Literature Review	17
2.1 Introduction.....	17
2.2 Fluid Flow Models	17
2.3 Queueing Models	18
2.4 Simulation-based Models.....	19
2.5 Simulation-based Regression Models.....	20
2.6 Summary	21
Chapter 3. Methodology	22
3.1 Step 1- Estimating the Steady Queue Length	22
3.2 Step 2 - Modeling the Queue Formation and Dispersion Processes	24
3.3 Step 3 - Development of the Final Model.....	34
3.4 Summary	36
Chapter 4. A Case Study	38
4.1 Simulation Scenario Design.....	38
4.2 Case Study Results.....	38
Discussions	40
Chapter 5. Conclusions and Recommendations.....	41
References.....	42
Appendix.....	44
A. QUEUE FORMATION SIMULATION PROGRAM.....	44
B. QUEUE DISPERSION SIMULATION PROGRAM.....	48

List of Figures

Figure 1. International maritime trade tendency	14
Figure 2. Truck congestion at terminal gate in the Bayport Ingate	15
Figure 3. Quantity of fluid and time in fluid flow queue diagram.....	18
Figure 4. Flowchart of the modeling method.....	22
Figure 5. Simulation results for an example scenario ($S = 20$ and $\alpha = 19$)	26
Figure 6. Estimation of the Queue Length for the Queue Formation State	35
Figure 7. Model Flowchart	37
Figure 8. Estimated Truck Queue Lengths by Different Models for the Case Study	39

List of Tables

Table 1. Regression models for the Queue Formation State	28
Table 2. Regression models for the Queue Dispersion State.....	31

EXECUTIVE SUMMARY

As international trade and freight volumes increase, there is a growing port congestion problem, leading to the long truck queues at US marine terminal gates. To address this problem, some countermeasures have been proposed and implemented for reducing truck queue length at marine terminals. To assess the effectiveness of these countermeasures, a method for accurately estimating terminal gate truck queue length is needed.

This study developed a new method, named the state-dependent approximation method, for estimating the truck queue length at marine terminals. Based on the simulation of the truck queuing system, it was found that it takes several hours for the truck queue length to reach its steady-state, and neglecting the queue formation (queue dispersion) processes will cause overestimation (underestimation) of truck queue length. The developed model can take into account the queue formation and dispersion processes, and it can be used to estimate the truck queue length caused by short-term oversaturation at marine terminals. For model evaluation, a simulation-based case study was conducted to evaluate the prediction accuracy of the developed model by comparing its results with the simulated queue lengths and the results of other four existing methods, including the fluid flow model, the M/M/S queuing model, and a simulation-based regression model developed a previous study. The evaluation results indicate that the developed model outperformed the other four modeling methods for different states of queue formation and dispersion processes. In addition, this new method can accurately estimate the truck queue length caused by the short-term system oversaturation during peak hours. Therefore, it will be useful for assessing the effectiveness of the countermeasures that are targeted at reducing the peak-hour congestion at marine terminals.

Chapter 1. Introduction

1.1 Problem Statement

Container marine terminals are the places where most of the world’s goods are transferred. With over 80% of global trade by volume and more than 70% of its value being carried onboard ships and handled by seaports worldwide, the importance of maritime transport for trade and development cannot be overemphasized. According to the report from United Nations Conference on Trade and Development (UNCTAD, 2018), shown as Figure 1, maritime trade has grown at a compound annual rate of 4% over the past decade, the total maritime trade in 2017 has grown almost three times since 1980.

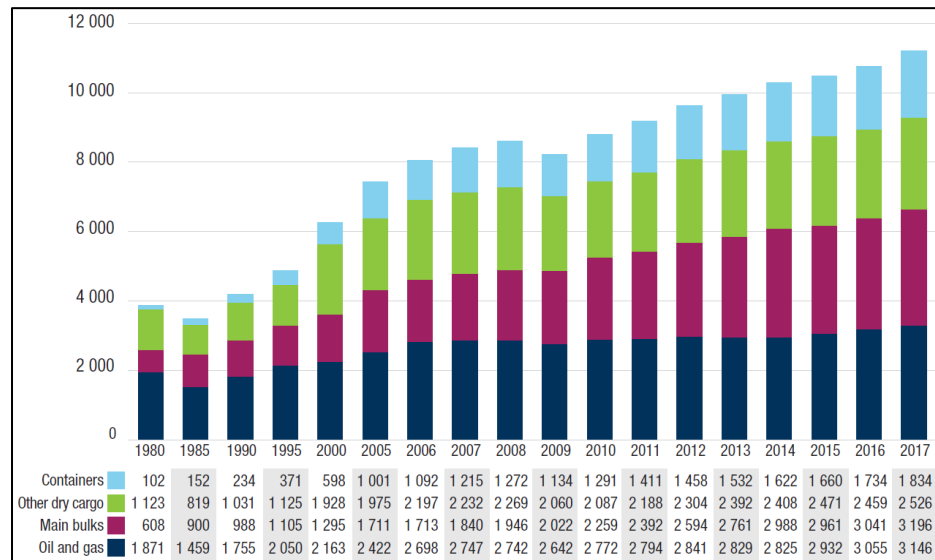


Figure 1. International maritime trade tendency
 (Unit: Millions of tons loaded)
 (Source: UNCTAD, 2018)

The growth in international maritime trade has resulted in the roadway transportation systems of metropolitan areas, especially around the major generators that are ports, airports, rail yards, and industrial areas causing congestion and delays, the congestion even extends to the surrounding networks of roads (Figure 2). In addition, this situation seriously hampers the smooth operation of ports and other nearby businesses, resulting in huge economic losses. The environmental effects resulting from idling trucks has also been starting to emerge as a serious problem as truck emissions have been linked to health conditions including asthma, cancer and heart disease (Solomon and Bailey 2004). As a large number of trucks arrive the marine terminals gate for importing and exporting containers, it can be expected that more pressure would be on marine terminals to manage its activities and schedule its resources properly. These growing activities

increase the complexity of marine terminals related planning and operational control problems.



Figure 2. Truck congestion at terminal gate in the Bayport Ingate
(Source: Port of Houston, 2019)

Marine terminals are usually located in or near major cities, where right of way is limited and very expensive. Implementing operational strategies to reduce the effect of the terminals' truck related traffic on the surrounding roadway network and the terminal operations is generally more feasible than physical capacity expansions. The increased container volumes required to be handled by marine terminals in optimum time highlight the need for the development of innovative countermeasures at a strategic, tactical and operational level. For example, using a gate appointment system to manage the truck arrivals and applying advanced communication and image processing technologies to reduce the gate service time.

To assess the effectiveness of these countermeasures, a method is needed that can accurately estimate the truck queue length at terminal gates. The existing methods, such as queuing models and fluid flow models, have limitations and cannot provide accurate estimates of the truck queue length when certain conditions exist. For example, the traditional queuing models cannot handle oversaturated situations (when demand exceeds capacity), which occur often during peak hours at marine terminals. Note that, the capacity in this study is referred to as the service capacity of a terminal gate, which is equal to the average service rate per gate booth multiplied by the number of gate booths. In addition, most of the queuing models (Guan, 2009, Chen et al., 2011 and Green and Kolesar, 1991) do not consider the processes involved in the formation and dispersion of queues. Note that, truck queue length cannot reach its steady-state instantaneously because there are queue formation and dispersion processes that can take many hours (Chen and Yang, 2014). Thus, due to the variations in the truck arrival rate and in the gate service time, the truck queue length may not be able to reach its steady-state before

the conditions are changed. Therefore, if the queue formation and dispersion processes are neglected, inaccurate queue length estimation will be produced.

1.2 Objectives

To fill these gaps, this study is to develop a new method, named the state-dependent approximation method, for estimating the truck queue length at marine terminals by using the simulation-based, regression-modeling approach. The proposed new method considers both the queue formation and dispersion processes and can also estimate the truck queue length caused by short-term system oversaturation at marine terminals. Therefore, it can provide a more robust and better estimation of truck queue length at marine terminal gates than the existing methods.

1.3 Report Overview

The remainder of this report is organized as follows: Chapter 2 introduces the existing studies that used both analytical and simulation approaches for analyzing the marine terminal gates congestion. Chapter 3 presents a three-step methodology for truck queue length estimations under different conditions. Chapter 4 presents a case study to evaluate the accuracy of the developed model and discusses the results of this study. In the end, the conclusions and recommendations are summarized in Chapter 5

Chapter 2. Literature Review

2.1 Introduction

The existing studies used both analytical and simulation approaches to analyze the congestion at the container terminal gates. Some of them focus on the estimation of the truck queue length and waiting time at the terminal gates (Yoon, 2007; Guan, 2009; Minh and Huynh, 2017; and Chen and Yang, 2014). Some studies analyzed the impacts of vehicle queue length on the approach roads to the container terminals (Grubisic et al., 2020; and Preston et al., 2020). Some studies investigated different operational strategies, such as truck appointment systems, extending gate hours, and pooled queue strategy, on the reduction of gate congestions (Huynh and Walton, 2008; Namboothiri and Erera, 2008; Karafa, 2012; Fleming et al., 2013; Li et al., 2018; and Azab et al, 2020). In this literature review, we focus on the methods for estimating the truck queue length at the terminal gate. In general, there are four typical types of existing methods, i.e. fluid flow models, queuing models, simulation-based models, and simulation-based regression models. An introduction of these existing methods and some representative studies for each method are presented below.

2.2 Fluid Flow Models

Fluid flow models have been used to model many types of queues such as telecommunication queues and vehicle queues at roadway intersections. It follows the flow balance principle, meaning the change in a queue equals to flow-in minus flow-out, which can be mathematically expressed as follows

$$l_t = l_{t-1} + \lambda_t - \mu_t$$

Where,

l_t is the average queue length in the time interval $[0, t]$;

λ_t is the average arrival rate in the time interval $[0, t]$;

μ_t is the average service rate in the time interval $[0, t]$.

Martonosi (2011) used fluid flow model to study dynamically switch servers between the two queues in order to minimize the total waiting time. In this paper, the basic idea of fluid flow model is illustrated as Figure 3.

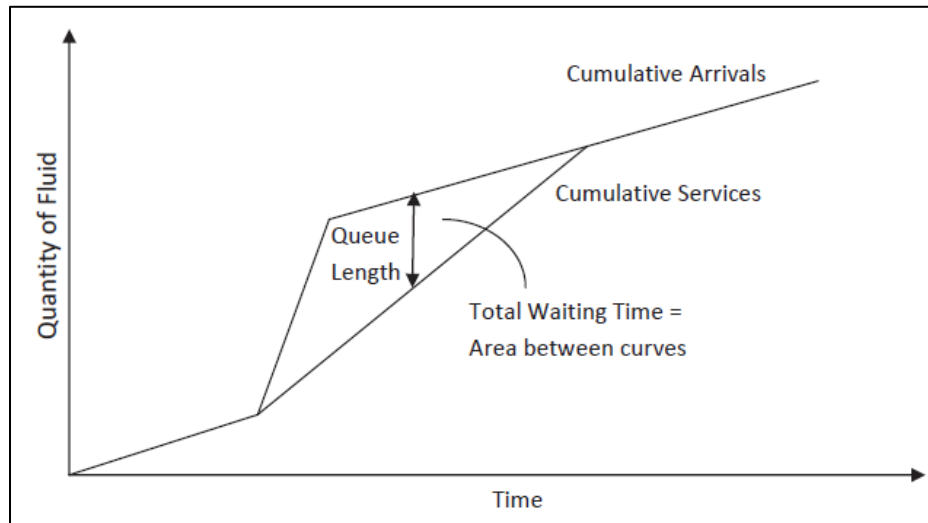


Figure 3. Quantity of fluid and time in fluid flow queue diagram

(Source: Martonosi, 2011)

According to Figure 3, the queue length is the difference between the cumulative arrivals (upper curve) and services (lower curve). Compare with other methods, this method is simple and easy to use. Most importantly, it can estimate the queue length in both under-saturated and oversaturated conditions. However, this method is deterministic in nature because it assumes uniform arrival and service rates and cannot take account of the queue caused by the random fluctuations in the arrival rate or the variations in the service time. For example, in Figure 3 according to the fluid flow model, queue will develop only if the arrival rate exceeds the service rate (the oversaturated condition). However, queue will always form even if the arrival rate is less the service rate because of the random fluctuations in the arrival and service rates. Consequently, the fluid flow method tends to underestimate the queue length.

2.3 Queuing Models

Two types of queuing models, i.e., stationary and non-stationary models, have been used in modeling the length of the queue of trucks at the gates of marine terminals. The stationary queuing models are based on the classical queueing theory, which estimates the length of the steady state queue at given service and arrival rates. These models are useful for determining the steady state performance of a queuing system. Yoon (2007) used M/M/1 and M/M/S queuing models to estimate the delay of the truck as containers are inspected at two successive stages of security inspections. Guan (2009) applied a multi-server M/Ek/s queuing model to analyze congestion at the container's terminal gate and to quantify the cost associated with the truck's waiting. Minh and Huynh (2017) expanded the work of Guan (2009) by providing design engineers with a methodology to investigate the possible benefit of using a pooled queuing strategy for inbound terminal gate trucks and to determine the optimal number of service gate booths for different truck waiting time threshold. The major problem with the stationary queuing models is that the queue formation and dispersion processes were neglected. Actually, the truck queue length cannot reach its steady state instantaneously and the queue formation

or dispersion process can take up to 24 hours (Chen and Yang, 2014). As a result, the stationary queuing models can not accurately estimate the time-varying truck queue lengths at marine terminals. In addition, the queuing models cannot handle oversaturated situations, which often occur at congested marine terminals where demand exceeds capacity during peak hours.

To address the problem of time-varying queue length Chen et al. (2011) used a non-stationary queuing model to estimate the truck queue lengths at ports. In their model, a time-dependent capacity utilization ratio was used to estimate the time-dependent length of the queue. This time-dependent capacity utilization ratio was derived using the steady state queue-length equation of the stationary queuing model, which is based on the assumption of an undersaturated queuing system. As a result, this model is not applicable to the temporarily oversaturated queuing systems too. Other non-stationary queuing models, such as the pointwise stationary approximation (PSA) model developed by Green and Kolesar (1991), also are based on stationary queuing models, thereby inheriting this same problem of the stationary queuing models. Chen et al. (2013) applied a multi-serve non-stationary queuing model to analyze the maritime terminal gate system. In order to be able to solve the oversaturated queuing problem, the authors selected the fluid flow based pointwise stationary approximation method and integrating it with the bisection method and a correction factor. However, this model was developed based on the assumption of a specific parameter of the gate service time distribution, which limits the applicability of the model.

2.4 Simulation-based Models

Numerous studies have used simulation models to investigate the problem of truck congestion at marine terminals. In these studies, the discrete-event simulation and agent-based simulation are two major approaches.

- Discrete-event simulation

Discrete-event simulation is one of the most popular techniques in port operation modeling (Dragović et al., 2017). Azab & Eltawil (2016) used a discrete event simulation model FlexSim to study the problem of long Truck Turn Times (TTTs) for external trucks at marine container terminals. In this study, special simulation software for container terminal operations was used to estimate the TTTs and the maximum truck queue lengths for different arrival patterns. Derse and Gocmen (2018) used ARENA, a discrete event simulation software, to analyze the operating performance measures of a container terminal system, including ship waiting times, queue time of the processes, the number of the containers at the queue, the usage rate of the resources and the number of the loading-unloading containers. Preston et al. (2018) used a discrete-event simulation model in analyzing the future operation of a ferry port considering the increased traffic volumes. Preston et al. (2020) also used this model for identifying the critical thresholds for vehicle processing times that would cause the system to become oversaturated.

- Agent-based simulation

An agent-based model is another common type of approach for simulating the port operation. Karafa et al. used an agent-based simulation PARAMICS to investigate the effectiveness of the truck appointment system, as well as extending gate hours. Sherif et al. (2011) used an agent-based simulation and solutions by EI Farol model to achieve the steady arrival of trucks and hence less queuing at congestion at port terminal gates. Fleming et al. (2013) used agent-based simulation to model the terminal gate system with two different queuing strategies (pooled and non-pooled queues) to evaluate the system's operational performance in various conditions.

The use of simulation models is an effective approach for investigating the queuing process because it takes into account the random fluctuations in the arrival and service rates, and these models can provide estimates of the queue lengths for various scenarios. The limitations of the simulation-based approach are that 1) conducting the simulation is time-consuming and 2) the results of simulation studies cannot be applied easily to new scenarios that have yet to be simulated. To overcome this problem, an approach, called simulation-based regression modeling, has been used by previous studies.

2.5 Simulation-based Regression Models

Simulation-based regression models have been developed in several previous studies for modeling the truck queue length at marine terminals. In these studies, a simulation model was developed that could be used initially to simulate the operations at marine terminals and derive the truck queue lengths for different scenarios. Then, based on the results of the simulation, regression models were developed and used to estimate the truck queue lengths in different scenarios. Thus, the regression models are used to generalize the simulation results in order to predict the truck queue lengths beyond the simulated scenarios.

Pham et al. (2011) evaluated the suitability of four predictive models capable of dealing with fuzzy data: multiple linear regression, fuzzy regression, clustering fuzzy regression, and support vector machines. The advantage is that the distributions of the truck inter-arrival time and truck processing time are not required in these models. The independent variables include gate congestion level, time of day, day of the week, month of the year, weather condition, queue length, gate processing time, and truck arrival rate. The dependent variable is the truck queuing time which is defined as the difference between the time the truck departs the queue and the time it joins the back of the queue. It was determined that the statistically significant variables are queue length, gate processing time, and truck arrival rate. The results showed that the fuzzy regression, support vector machines, and multiple linear regression models have comparable performance that is better than the fuzzy clustering regression model, while the fuzzy regression and support vector machines models perform relatively better. However, the models in this study can only be used in light to moderate gate congestion conditions since up to six truck queues can be captured due to the webcam's angle.

Chen and Yang (2014) used a microscopic traffic simulation tool, PARAMIC, to simulate a container terminal system and observe the truck queuing process. In their

study, they pointed out that “a queue cannot reach its steady state instantaneously,” and, according to its simulation results, it can take up to 24 hours for the queue to reach a steady length. Based on this finding, the truck queue length was estimated separately for two different states, i.e., 1) the queue formation state and 2) steady state. For “steady state,” a stationary queuing model, M/G/S, is used to estimate the steady queue length according to the arrival and service rates. For the queue formation state, a set of regression models was developed for estimating the queue lengths during the queue formation process based on the simulation results. It is important to note that this is the first study that pointed out and verified the need for considering the queue-formation process in modeling the truck queue length. However, it only considers the queue formation process without considering the queue dispersion process, which can also affect the accuracy of the queue estimation. In addition, in their study, a model was developed specifically for a given marine terminal with a given number of gate booths (2) at a fixed service rate (40.8 trucks per hour), and these specific conditions limit the applicability of the model.

2.6 Summary

Based on the literature review, it can be concluded that the existing methods used to estimate truck queue length at the marine terminal gate have their limitations and cannot provide accurate truck queue length estimation under certain conditions.

The fluid flow model is simple and easy to use. Most importantly, it can estimate the queue length in both under-saturated and oversaturated conditions. However, this method is deterministic in nature because it assumes uniform arrival and service rates and cannot take account of the queue caused by the random fluctuations in the arrival rate or the variations in the service time. Consequently, the fluid flow method tends to underestimate the queue length.

Stationary queuing models are useful for determining the steady-state performance of a queuing system. But the major problem is that the queue formation and dispersion process was neglected. In addition, these models cannot handle oversaturated situations, which often occur at congested marine terminals where demand exceeds the capacity during peak hours. As a result, the stationary queuing models can not accurately estimate the time-varying truck queue lengths at marine terminals.

Nonstationary queueing models are proposed and used to estimate the queue lengths at varying arrival and service rates. However, since most of the Nonstationary queueing models are developed based on the stationary queuing models, thereby inheriting the same problems of the stationary queueing model. For example, most of them cannot be used to estimate queue length under the oversaturated condition.

Simulation models are effective for investigating the queue formation process because they can take account of the random fluctuations in the arrival and service rates and can provide queue length estimation for various scenarios. However, it can only provide the estimation for the specific case and time-consuming. Most importantly, the results of the simulation studies are limited by the designed scenarios and they cannot be easily applied to new scenarios that have not to be simulated yet.

The new method that we proposed in this study is a type of simulation-based regression model.

Chapter 3. Methodology

This research was conducted to develop a new method, named state-dependent approximation method, for estimating truck queue length at marine terminals. The model was developed based on the method proposed by Chen and Yang (2014), but it expanded two critical aspects of their work. First, both queue formation and dispersion processes have been considered in the estimation of truck queue length. Thus, the truck queue length was estimated separately for four different states: I) steady-state, II) queue formation state, III) queue dispersion state, and IV) oversaturated state. Second, the proposed model can be used for estimating truck queue length at the marine terminals with different numbers of gate booths and various service rates.

This model was developed in three steps, i.e., 1) estimating the steady queue length, 2) modeling the queue formation and dispersion processes, and 3) developing the final model. This three-step method is illustrated in Figure 4.

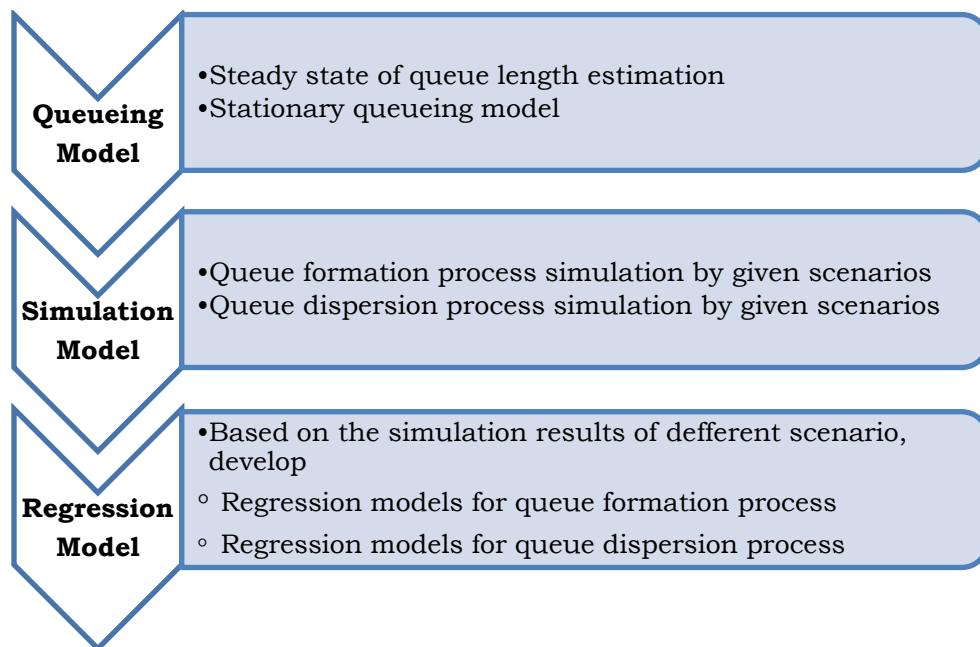


Figure 4. Flowchart of the modeling method

3.1 Step 1- Estimating the Steady Queue Length

In this step, a multi-server (M/M/S) queuing model was used to estimate the steady-state length of the queue of trucks. A marine terminal gate system that has multiple

inbound and outbound gates can be treated as a multi-server queuing system. In this queuing system, it is assumed that 1) the number of parallel servers (S) is the number of gate booths, 2) the truck arrival rate (number of trucks arriving per hour) follows a Poisson distribution (M), and 3) the service time for each gate follows an exponential distribution (M). Under these assumptions, the system utilization factor (ρ) is given by the following equation:

$$\rho = \frac{\lambda}{C} = \frac{\lambda}{\mu S} \quad (2)$$

Where λ is the average truck-arrival rate (average number of trucks arriving per hour), C is the service capacity of a terminal gate, μ is the average service rate per gate booth (average number of trucks that can be served per hour per gate booth), and S is the number of gate booths.

Then, according to the M/M/S queuing model, the steady state of the truck queue length (the average number of trucks in the queue) can be estimated by the following equation:

$$L = \frac{P_0 \left(\frac{\lambda}{\mu} \right)^s \rho}{S!(1-\rho)^2} = \frac{P_0 \alpha^s \rho}{S!(1-\rho)^2} \quad (3)$$

where $\alpha = \lambda / \mu$ is referred to as traffic density (Guan, 2009), and P_0 is the probability that no trucks are in the queue ($L = 0$); P_0 can be estimated by the following equation:

$$P_0 = \left[\sum_{n=0}^{s-1} \frac{\left(\frac{\lambda}{\mu} \right)^n}{n!} + \frac{\left(\frac{\lambda}{\mu} \right)^s}{S!} \left(\frac{1}{1-\rho} \right) \right]^{-1} = \left[\sum_{n=0}^{s-1} \frac{(\alpha)^n}{n!} + \frac{(\alpha)^s}{S!} \left(\frac{1}{1-\rho} \right) \right]^{-1} \quad (4)$$

According to Equations 2 and 3, the steady queue length, L , is a function of α , ρ , and S . Besides, since

$$\rho = \frac{\lambda}{\mu S} = \frac{\alpha}{S},$$

ρ is a function of α and S . Therefore, the steady queue length L can be viewed as a function with only two variables α and S as follows:

$$L = \frac{P_0 \left(\frac{\lambda}{\mu} \right)^s \rho}{S!(1-\rho)^2} = \frac{P_0 \alpha^s \rho}{S!(1-\rho)^2} = \frac{P_0 \alpha^s \frac{\alpha}{S}}{S! \left(1 - \frac{\alpha}{S}\right)^2} = \frac{P_0 \frac{\alpha^{s+1}}{S}}{S! \left(1 - \frac{\alpha}{S}\right)^2}$$

(5)

where

$$P_0 = \left[\sum_{n=0}^{s-1} \frac{(\alpha)^n}{n!} + \frac{(\alpha)^s}{S!} \left(\frac{1}{1-\rho} \right) \right]^{-1} = \left[\sum_{n=0}^{s-1} \frac{(\alpha)^n}{n!} + \frac{(\alpha)^s}{S!} \left(\frac{1}{1-\frac{\alpha}{S}} \right) \right]^{-1} = \left[\sum_{n=0}^{s-1} \frac{(\alpha)^n}{n!} + \frac{(\alpha)^s}{S!} \left(\frac{\alpha}{S-\alpha} \right) \right]^{-1}$$

Equation 5 shows that L can be determined once the values of α and S are given.

3.2 Step 2 - Modeling the Queue Formation and Dispersion Processes

A simulation-based regression modeling approach was used to model the formation and dispersion processes of the queue. Initially, a queuing simulation model was developed to simulate the queue formation and dispersion processes in different scenarios. Based on the simulation results, a set of regression models was developed for estimating the average truck queue length at a particular moment of the queue formation and dispersion processes.

- Queuing Simulation

A queuing simulation model was developed using MATLAB. In the simulation, the arrival time of a truck and the truck service time is determined according to the random numbers generated from two exponential distributions. The parameters of these two exponential distributions were set according to the truck arrival rate and the gate service rate. The simulation time is set enough long (up to 60 hours) to allow the queue to reach its steady state. Since the steady queue is only determined by two variables, i.e., traffic density ($\alpha = \lambda / \mu$) and the number of gate booths (S), different simulation scenarios were designed by varying these two variables. In this study, based on an interview with managers at a marine terminal in the Houston area, S was set from 2 to 21, which is the range of the number of gate booths that usually are open at marine terminals. The value of α was set according to S because ρ is equal to α / S and there are some constraints on the value of ρ . First, to reach a steady-state, the system utilization factor (ρ) should be less than 1. Second, ρ should not be very small, otherwise, the steady queue length will be very short and can be reached instantaneously. Using the trial-and-error method, the minimum value of ρ was set as 0.75. Thus, ρ varies from 0.75 to 1. For the design of the simulation scenarios, the value of ρ varies from 0.75 to 0.95 in 0.05 increments. Since ρ is equal to α / S , the value of α varies from $0.75S$ to $0.95S$ in $0.05S$ increments. As listed in Tables 1 and 2, 95 different simulation scenarios were designed by varying the two variables, S and α . Note that, in the real-world application, if $\alpha = \lambda / \mu$ is not equal to the values listed in Tables 1 and 2, the interpolated method could be used for deriving the estimated queue length l_t .

Since the simulation is driven by stochastic factors, for each designed simulation scenario, 500 simulation runs were conducted for both the queue formation and queue

dispersion processes. The simulated lengths of the queue were averaged, and the average queue lengths showed a clearly-developed trend (Figure 2). Figure 2(a) is the simulation result for the queue formation process for an example scenario ($S = 20$ and $\alpha = 19$), and Figure 2(b) is the simulation result for the queue dispersion process for the same scenario. Note that, the initial queue length is set at 0 for the queue formation process, and for the queue dispersion process, the initial queue is generated by doubling the arrival rate to make the system oversaturated for the first hour. In Figure 2a (Figure 2b), the queue length continues increasing (decreasing) until it reaches a steady-state, then it fluctuates slightly within a range. In Figure 2, the critical point is the first time point at which the queue length reached its steady state. The steady queue length (14.3526) was estimated by using Equation 5. Using this critical point as a boundary, the entire queuing formation (dispersion) process can be divided into two states, i.e., 1) queue formation (dispersion) state and 2) steady-state. Figure 2 shows that it takes a long time for the length of the queue to reach a steady state. Therefore, if the queue formation (dispersion) process is neglected, the length of the queue in the queue formation (dispersion) state will be overestimated (underestimated).

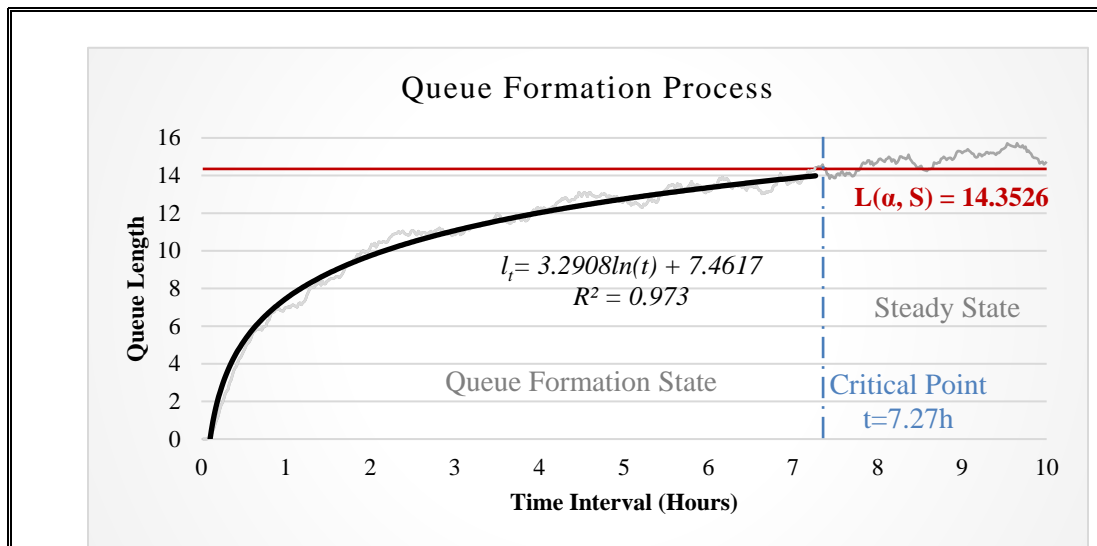


Figure 2a. Queue formation process

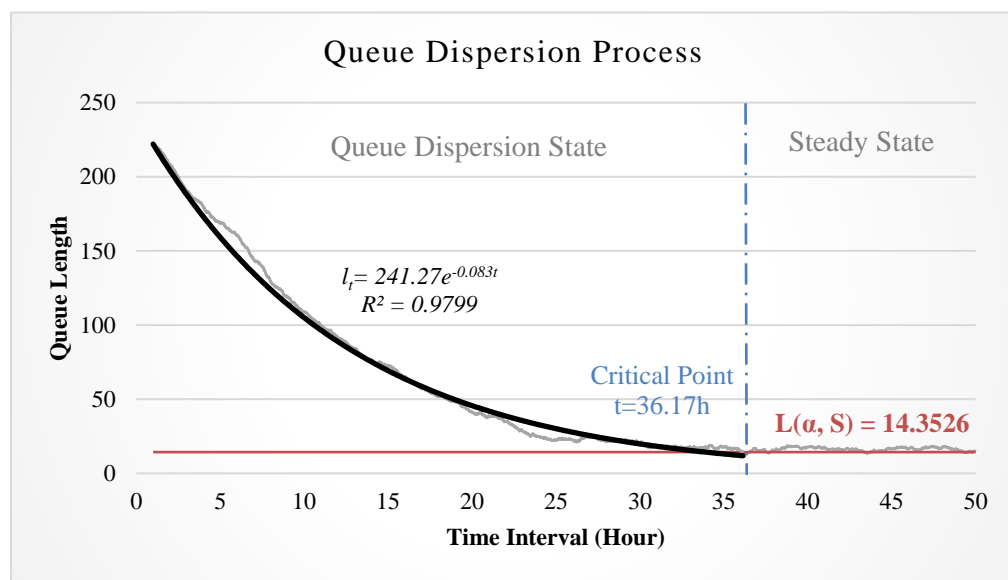


Figure 2b. Queue dispersion process

Figure 5. Simulation results for an example scenario ($S = 20$ and $\alpha = 19$)

- Development of Regression Models

Based on the simulation results, regression models were developed for estimating the queue length at a particular moment of queue formation or queue dispersion state.

For the queue-formation state, it was found that the natural logarithm curve fit the simulated queuing curve well (Figure 2.a). Therefore, the following regression model used by Chen and Yang (2014) was used for modeling the queue length during the queue formation state:

$$l_t = a_1 \ln(t) + b_1 + \varepsilon, t \in [0, \text{critical point}] \quad (6)$$

where t is the time interval, l_t is the queue length at t , and a_1 and b_1 are the coefficients for the regression model for the queue formation state.

For the queue dispersion state, it was found that the natural exponential curve fit the simulated queue formation curve better (Figure 2.b). Therefore, the regression model for the queue dispersion stage is:

$$l_t = a_2 \exp(b_2 t) + \varepsilon, t \in [0, \text{critical point}] \quad (7)$$

where t is the time interval, l_t is the queue length at t , and a_2 and b_2 are the coefficients for the regression model for the queue dispersion state.

For each simulation scenario, the simulated queue lengths before reaching the critical point were used to develop the regression model. The modeling results for different simulation scenarios for both the queue formation state and the queue dispersion state are presented in Tables 1 and 2, respectively.

Table 1. Regression models for the Queue Formation State

SIMULATION SCENARIOS			SIMULATION RESULTS				STEADY QUEUE LENGTH (L) ESTIMATED BY THE QUEUING MODEL
			Time to Reach Steady State (hours)	Regression Models $l_t = a_1 \ln(t) + b_1$, $t \in [0, \text{critical point}]$			
S	$\alpha = \lambda/\mu$	ρ		a_1	b_1	R^2	
2	1.5	0.75	1.6	0.5496	1.662	0.9043	2.0887
	1.6	0.8	3.17	0.5984	1.9951	0.9037	3.1263
	1.7	0.85	5.07	1.0612	2.9571	0.9019	4.9888
	1.8	0.9	10.92	1.8115	4.1236	0.9333	9.1168
	1.9	0.95	18.43	5.5311	5.3286	0.9227	24.9526
3	2.25	0.75	1.02	0.4791	1.41	0.9001	1.7033
	2.4	0.8	1.92	0.687	1.7732	0.9113	2.5888
	2.55	0.85	6.17	0.8219	2.0216	0.9002	4.1388
	2.7	0.9	6.85	1.6	3.1657	0.936	7.3535
	2.85	0.95	24.07	3.1828	4.9391	0.9184	17.2332
4	3	0.75	0.95	0.4769	1.4356	0.9088	1.5283
	3.2	0.8	1.67	0.551	1.6508	0.9012	2.3857
	3.4	0.85	2.10	1.0272	2.5478	0.9125	3.9061
	3.6	0.9	6.40	1.3923	3.5117	0.9272	7.0898
	3.8	0.95	20.80	3.3506	4.7571	0.9257	16.937
5	3.75	0.75	1.38	0.3939	1.1845	0.9083	1.3854
	4	0.8	1.82	0.6117	1.7434	0.9088	2.2165
	4.25	0.85	3.40	0.9129	2.1158	0.9109	3.7087
	4.5	0.9	5.63	1.5224	3.384	0.9013	6.8624
	4.75	0.95	17.77	3.4924	5.1727	0.9385	16.6782
6	4.5	0.75	0.67	0.3902	1.1976	0.8684	1.265
	4.8	0.8	1.52	0.6158	1.6264	0.9051	2.0711
	5.1	0.85	3.80	0.8279	2.2095	0.9108	3.5363
	5.4	0.9	6.70	1.5462	3.4707	0.9113	6.6611
	5.7	0.95	15.10	3.206	6.3214	0.9206	16.4462
7	5.25	0.75	0.63	0.4664	1.3448	0.8414	1.1614
	5.6	0.8	1.13	0.5639	1.5933	0.9075	1.9438
	5.95	0.85	1.90	0.9113	2.4528	0.9152	3.3829
	6.3	0.9	3.58	1.6988	3.6956	0.9205	6.4796
	6.65	0.95	14.30	3.5003	6.3407	0.9323	16.2346
8	6	0.75	0.82	0.3419	0.9508	0.8421	1.0709
	6.4	0.8	0.92	0.5609	1.6412	0.9046	1.8306
	6.8	0.85	2.03	0.9082	2.1834	0.903	3.2446
	7.2	0.9	3.93	1.476	3.6504	0.9441	6.3138
	7.6	0.95	15.07	2.8699	6.2115	0.9212	16.0392

Table 1. Regression models for the Queue Formation State (continued)

SIMULATION SCENARIOS			SIMULATION RESULTS				STEADY QUEUE LENGTH (L) ESTIMATED BY THE QUEUING MODEL
			Time to Reach Steady State (hours)	Regression Models $l_t = a_1 \ln(t) + b_1$, $t \in [0, \text{critical point}]$			
S	$\alpha = \lambda/\mu$	ρ		a_1	b_1	R^2	
9	6.75	0.75	0.65	0.3244	0.9625	0.8376	0.9911
	7.2	0.8	0.88	0.5121	1.4498	0.8745	1.7289
	7.65	0.85	2.65	0.7144	2.1002	0.9293	3.1184
	8.1	0.9	4.13	1.2183	3.5405	0.9402	6.1608
	8.55	0.95	12.15	3.0204	5.8623	0.9125	15.8571
10	7.5	0.75	0.63	0.3075	0.8862	0.8362	0.9198
	8	0.8	1.25	0.4328	1.2042	0.8919	1.6367
	8.5	0.85	1.80	0.7387	2.1294	0.9001	3.0025
	9	0.9	3.22	1.528	3.5336	0.9072	6.0186
	9.5	0.95	11.67	3.3032	6.4172	0.9412	15.6861
11	8.25	0.75	0.72	0.2412	0.7163	0.8493	0.8559
	8.8	0.8	1.13	0.4305	1.2839	0.8902	1.5526
	9.35	0.85	1.73	0.7532	2.0954	0.9029	2.8953
	9.9	0.9	3.02	1.5566	3.8807	0.9241	5.8855
	10.45	0.95	6.50	3.2303	6.9972	0.9216	15.5247
12	9	0.75	0.47	0.2883	0.8982	0.8496	0.7981
	9.6	0.8	0.65	0.5423	1.5628	0.8475	1.4754
	10.2	0.85	1.47	0.7352	1.9378	0.8678	2.7956
	10.8	0.9	2.18	1.6461	3.8623	0.895	5.7604
	11.4	0.95	10.90	3.57	6.1661	0.9239	15.3715
13	9.75	0.75	0.77	0.2114	0.6772	0.8731	0.7456
	10.4	0.8	0.85	0.3607	1.0585	0.8127	1.4041
	11.05	0.85	1.55	0.7702	2.1661	0.9037	2.7024
	11.7	0.9	2.10	1.6288	4.003	0.9098	5.6422
	12.35	0.95	5.70	3.4051	7.1178	0.9324	15.2255
14	10.5	0.75	0.65	0.2545	0.7192	0.8155	0.6978
	11.2	0.8	1.12	0.3904	1.0828	0.828	1.3381
	11.9	0.85	1.62	0.7569	1.955	0.9042	2.6149
	12.6	0.9	2.57	1.3232	3.5006	0.907	5.5302
	13.3	0.95	5.60	3.7782	7.9171	0.9356	15.086
15	11.25	0.75	0.73	0.2205	0.6503	0.8114	0.654
	12	0.8	1.12	0.3466	1.0322	0.8212	1.2768
	12.75	0.85	1.60	0.6317	1.8434	0.8081	2.5326
	13.5	0.9	2.42	1.4169	3.6617	0.9183	5.4237
	14.25	0.95	7.35	3.1303	6.9993	0.9426	14.9522

Table 1. Regression models for the Queue Formation State (continued)

SIMULATION SCENARIOS			SIMULATION RESULTS				STEADY QUEUE LENGTH (L) ESTIMATED BY THE QUEUING MODEL
			Time to Reach Steady State (hours)	Regression Models $l_t = a_1 \ln(t) + b_1,$ $t \in [0, \text{critical point}]$			
S	$\alpha = \lambda/\mu$	ρ		a_1	b_1	R^2	
16	12	0.75	0.42	0.2439	0.7567	0.803	0.6137
	12.8	0.8	1.25	0.3464	0.9659	0.8382	1.2195
	13.6	0.85	1.58	0.7098	1.9418	0.8792	2.4549
	14.4	0.9	2.65	1.1969	3.2778	0.8887	5.3221
	15.2	0.95	6.63	3.0118	6.8217	0.8988	14.8237
17	12.75	0.75	0.48	0.1942	0.6021	0.8205	0.5766
	13.6	0.8	0.6	0.4233	1.2191	0.8212	1.166
	14.45	0.85	0.98	0.8053	2.295	0.8393	2.3814
	15.3	0.9	1.37	1.4246	3.6318	0.8559	5.225
	16.15	0.95	5.25	3.0934	7.5561	0.9274	14.6998
18	13.5	0.75	0.88	0.1533	0.416	0.8008	0.5424
	14.4	0.8	1.13	0.3182	0.9613	0.8383	1.1158
	15.3	0.85	1.98	0.5366	1.5367	0.8158	2.3116
	16.2	0.9	2.23	1.424	3.6836	0.9046	5.132
	17.1	0.95	7.73	2.982	6.5964	0.9253	14.5802
19	14.25	0.75	0.45	0.1746	0.5408	0.8011	0.5107
	15.2	0.8	0.95	0.2895	0.8024	0.8018	1.0687
	16.15	0.85	1.62	0.5357	1.6298	0.8033	2.2452
	17.1	0.9	1.87	1.4706	3.6424	0.8992	5.0427
	18.05	0.95	5.10	3.4827	7.2951	0.8815	14.4646
20	15	0.75	0.82	0.1604	0.4685	0.8288	0.4813
	16	0.8	0.90	0.3403	0.9435	0.8851	1.0243
	17	0.85	1.03	0.7324	1.9957	0.8866	2.182
	18	0.9	2.55	1.3591	3.6086	0.9178	4.9569
	19	0.95	7.27	3.2908	7.4617	0.973	14.3526

Table 2. Regression models for the Queue Dispersion State

SIMULATION SCENARIOS			SIMULATION RESULTS				STEADY QUEUE LENGTH (L) ESTIMATED BY THE QUEUING MODEL
			Time to Reach Steady State (hours)	Regression Models $l_t = a_2 \exp(b_2 t)$ $t \in [0, \text{critical point}]$			
S	$\alpha = \lambda/\mu$	ρ		a_2	b_2	R^2	
2	1.5	0.75	4.63	50.53	-0.556	0.958	2.0887
	1.6	0.8	5.75	55.79	-0.374	0.9476	3.1263
	1.7	0.85	6.27	60.37	-0.312	0.9549	4.9888
	1.8	0.9	9.6	41.31	-0.154	0.9482	9.1168
	1.9	0.95	8.77	35.44	-0.033	0.9644	24.9526
3	2.25	0.75	6.42	25.52	-0.354	0.983	1.7033
	2.4	0.8	7.18	30.23	-0.311	0.9925	2.5888
	2.55	0.85	12.08	29.76	-0.156	0.9806	4.1388
	2.7	0.9	11.92	29.16	-0.11	0.9675	7.3535
	2.85	0.95	18.80	36.08	-0.038	0.9678	17.2332
4	3	0.75	6.92	27.61	-0.42	0.9177	1.5283
	3.2	0.8	7.58	37.03	-0.331	0.9554	2.3857
	3.4	0.85	11.82	32.65	-0.163	0.9561	3.9061
	3.6	0.9	13.97	41.88	-0.14	0.9879	7.0898
	3.8	0.95	22.08	40.22	-0.04	0.9618	16.937
5	3.75	0.75	4.25	72.61	-0.749	0.9958	1.3854
	4	0.8	7.70	51.92	-0.382	0.9817	2.2165
	4.25	0.85	10.98	42.78	-0.216	0.9697	3.7087
	4.5	0.9	19.08	56.25	-0.146	0.997	6.8624
	4.75	0.95	32.05	52.40	-0.038	0.9475	16.6782
6	4.5	0.75	5.27	67.53	-0.661	0.9705	1.265
	4.8	0.8	5.53	92.81	-0.567	0.9943	2.0711
	5.1	0.85	8.78	68.92	-0.316	0.9835	3.5363
	5.4	0.9	14.83	64.50	-0.155	0.9706	6.6611
	5.7	0.95	29.23	66.98	-0.047	0.9644	16.4462
7	5.25	0.75	4.18	124.8	-0.881	0.9956	1.1614
	5.6	0.8	6.02	97.33	-0.538	0.9976	1.9438
	5.95	0.85	8.73	80.81	-0.324	0.9898	3.3829
	6.3	0.9	14.07	74.34	-0.17	0.9765	6.4796
	6.65	0.95	28.75	76.73	-0.054	0.9862	16.2346
8	6	0.75	4.62	126.3	-0.866	0.9863	1.0709
	6.4	0.8	5.97	115.5	-0.616	0.9829	1.8306
	6.8	0.85	11.25	83.51	-0.292	0.9581	3.2446
	7.2	0.9	17.43	72.57	-0.149	0.9393	6.3138
	7.6	0.95	34.92	75.57	-0.047	0.9315	16.0392

Table 2. Regression models for the Queue Dispersion State (continued)

SIMULATION SCENARIOS			SIMULATION RESULTS				STEADY QUEUE LENGTH (L) ESTIMATED BY THE QUEUING MODEL
			Time to Reach Steady State (hours)	Regression Models $l_t = a_2 \exp(b_2 t)$ $t \in [0, \text{critical point}]$			
S	$\alpha = \lambda/\mu$	ρ		a_2	b_2	R^2	
9	6.75	0.75	4.20	177.7	-0.998	0.9922	0.9911
	7.2	0.8	6.45	137.8	-0.607	0.9901	1.7289
	7.65	0.85	8.67	137.8	-0.392	0.9885	3.1184
	8.1	0.9	15.32	101.4	-0.169	0.9911	6.1608
	8.55	0.95	35.42	86.84	-0.054	0.9277	15.8571
10	7.5	0.75	3.90	265.8	-1.146	0.9836	0.9198
	8	0.8	7.12	107.0	-0.553	0.9458	1.6367
	8.5	0.85	9.90	129.2	-0.367	0.9877	3.0025
	9	0.9	15.22	117.9	-0.198	0.9758	6.0186
	9.5	0.95	32.78	100.6	-0.061	0.953	15.6861
11	8.25	0.75	3.70	284.3	-1.148	0.9889	0.8559
	8.8	0.8	5.32	231.8	-0.755	0.9896	1.5526
	9.35	0.85	6.70	219.8	-0.499	0.9753	2.8953
	9.9	0.9	15.17	137.1	-0.209	0.9741	5.8855
	10.45	0.95	29.57	133.3	-0.071	0.9899	15.5247
12	9	0.75	4.13	271.0	-1.113	0.9902	0.7981
	9.6	0.8	4.63	312.3	-0.851	0.978	1.4754
	10.2	0.85	7.58	220.0	-0.514	0.9914	2.7956
	10.8	0.9	17.50	148.2	-0.183	0.9863	5.7604
	11.4	0.95	41.03	121.1	-0.05	0.9747	15.3715
13	9.75	0.75	3.45	432.0	-1.319	0.9833	0.7456
	10.4	0.8	4.75	385.6	-0.932	0.9632	1.4041
	11.05	0.85	9.90	161.9	-0.391	0.9725	2.7024
	11.7	0.9	17.72	142.8	-0.193	0.9597	5.6422
	12.35	0.95	29.63	161.8	-0.079	0.996	15.2255
14	10.5	0.75	5.02	304.2	-1.03	0.9794	0.6978
	11.2	0.8	6.68	271.5	-0.723	0.984	1.3381
	11.9	0.85	7.57	298.3	-0.545	0.9852	2.6149
	12.6	0.9	13.53	222.0	-0.257	0.9934	5.5302
	13.3	0.95	41.00	138.2	-0.059	0.9536	15.086
15	11.25	0.75	3.72	617.2	-1.422	0.979	0.654
	12	0.8	4.98	456.5	-0.913	0.9754	1.2768
	12.75	0.85	8.88	294.7	-0.509	0.9774	2.5326
	13.5	0.9	14.73	226.9	-0.241	0.993	5.4237
	14.25	0.95	31.60	183.4	-0.079	0.9893	14.9522

Table 2. Regression models for the Queue Dispersion State (continued)

SIMULATION SCENARIOS			SIMULATION RESULTS				STEADY QUEUE LENGTH (L) ESTIMATED BY THE QUEUING MODEL
			Time to Reach Steady State (hours)	Regression Models $l_t = a_2 \exp(b_2 t)$ $t \in [0, \text{critical point}]$			
S	$\alpha = \lambda/\mu$	ρ		a_2	b_2	R^2	
16	12	0.75	3.85	732.5	-1.466	0.9841	0.6137
	12.8	0.8	5.90	489.4	-0.932	0.966	1.2195
	13.6	0.85	8.87	287.2	-0.492	0.9914	2.4549
	14.4	0.9	18.60	184.7	-0.198	0.9679	5.3221
	15.2	0.95	30.10	184.7	-0.084	0.9778	14.8237
17	12.75	0.75	2.98	1170.	-1.729	0.9471	0.5766
	13.6	0.8	5.12	535.0	-0.978	0.9812	1.166
	14.45	0.85	9.28	341.8	-0.512	0.9855	2.3814
	15.3	0.9	16.57	223.3	-0.237	0.9685	5.225
	16.15	0.95	32.15	200.1	-0.087	0.9683	14.6998
18	13.5	0.75	6.42	394.8	-0.893	0.9717	0.5424
	14.4	0.8	8.38	403.9	-0.607	0.9779	1.1158
	15.3	0.85	8.85	382.4	-0.528	0.9823	2.3116
	16.2	0.9	14.15	280.5	-0.278	0.989	5.132
	17.1	0.95	40.57	187.9	-0.07	0.9521	14.5802
19	14.25	0.75	4.05	849.6	-1.469	0.9886	0.5107
	15.2	0.8	5.62	557.7	-0.954	0.9703	1.0687
	16.15	0.85	8.02	438.1	-0.579	0.989	2.2452
	17.1	0.9	16.93	236.5	-0.239	0.9463	5.0427
	18.05	0.95	32.45	215.6	-0.086	0.9759	14.4646
20	15	0.75	3.37	1495.	-1.737	0.9595	0.4813
	16	0.8	4.35	791.5	-1.078	0.9496	1.0243
	17	0.85	7.23	547.2	-0.647	0.9766	2.182
	18	0.9	13.47	367.4	-0.293	0.9878	4.9569
	19	0.95	35.17	241.2	-0.083	0.9799	14.3526

3.3 Step 3 - Development of the Final Model

Based on the regression models that were developed, the truck queue length can be estimated separately for four different states, i.e., 1) steady state, 2) queue formation state, 3) queue dispersion state, and 4) oversaturated state. The basic modeling ideal can be described by the following step-by-step procedure.

1. Check to determine whether or not the system is oversaturated. If the system utilization factor at time t, i.e., ρ_t , is equal to or greater than 1, then the system is oversaturated, which means the demand is greater than the capacity. In this case, a steady queue length cannot be reached, and the fluid flow model will be used to estimate the queue length as follows:

$$l_t = l_{t-1} + \lambda_t - \mu_t \times S \quad (8)$$

2. If the system is not oversaturated, then, according to the traffic density ($\alpha = \lambda / \mu$) and the number of gate booths (S) at time t, the steady queue length at time t, i.e., L_t , can be estimated according to Equation 5. After that, according to the estimated queue length at the time interval t-1, i.e., l_{t-1} , the state of the queuing process can be determined.

a. If $l_{t-1} < L_t$, it is at the queue formation state. Then, the regression models (see Equation 6) developed for the queue formation state (given in Table 1) will be used to estimate the length of the queue at time interval t. Figure 3 shows the basic idea for this step. According to the value of l_{t-1} , the time needed for the queue length to reach l_{t-1} can be derived by the regression model at first. Then, by adding 1 time interval, the current queue length l_t , can be estimated by the regression model. This can be expressed mathematically as follows:

$$l_t^{queueformation} = a_1(\alpha_t, S_t) \ln(t'+1) + b_1(\alpha_t, S_t) \quad (9)$$

where:

$$t' = \exp \frac{l_{t-1} - b_1(\alpha_t, S_t)}{a_1(\alpha_t, S_t)}$$

In addition, since the estimated queue length will not exceed the steady length of the queue, then:

$$l_t = \min\{l_t^{queueformation}, L_t\}$$

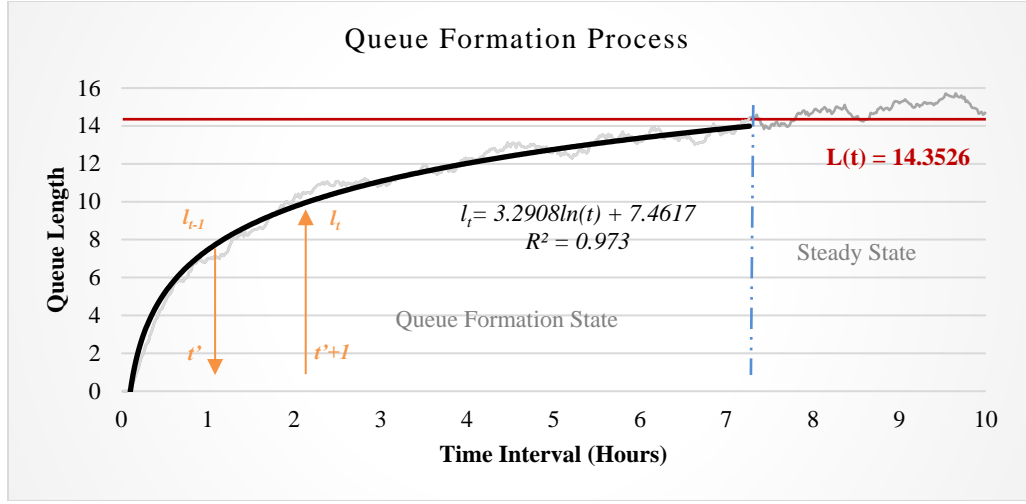


Figure 6. Estimation of the Queue Length for the Queue Formation State

- b. If $l_{t-1} > L_t$, it is at the queue dispersion state, and the regression models (see Equation 7) developed for the queue dispersion state will be used to estimate the queue length at time interval t . Similarly, the current queue length, l_t , can be estimated according to the value of l_{t-1} , by the following equations:

$$l_t^{queue\ dispersion} = a_2(\alpha_t, S_t) \exp[b_2(\alpha_t, S_t)(t'+1)]$$

(

10)

where:

$$t' = \ln\left(\frac{l_{t-1}}{a_2(\alpha_t, S_t)}\right) / b_2(\alpha_t, S_t)$$

and

$$l_t = \max\{l_t^{queue\ dispersion}, L_t\}$$

(

11)

- c. If $l_{t-1} = L_t$, it is at steady state, and then, the steady queue length L_t can be used for estimating l_t . Based on the modeling ideals described above, the overall model can be expressed mathematically as:

$$l_t = \begin{cases} \min\{l_t^{queue\ formation}, L_t\}, & l_{t-1} < L_t \\ L_t, & l_{t-1} = L_t \\ \max\{l_t^{queue\ dispersion}, L_t\}, & l_{t-1} > L_t \\ l_{t-1} + \lambda_t - \mu_t \times S, & \text{if } \rho_t \geq 1 \end{cases}, \quad \text{if } \rho_t < 1 \quad (12)$$

$$\text{where } \rho_t = \frac{\alpha_t}{S_t}$$

$l_t^{queueformation}$ is estimated by Equation 9

$l_t^{queuedispersion}$ is estimated by Equation 10

L_t is estimated by Equation 5

3.4 Summary

In this Chapter, a state-dependent approximation method for estimating truck queue length at marine terminals was developed. First, the critical point (the time interval that reaches the queue steady-state) was identified for each scenario by conducting thousands of simulations. Total 95 different scenarios were designed to simulate the truck queuing system with varied truck arrival rates and gate service rates, the results showed that it takes several hours for the truck queue length to reach its steady-state, it will cause overestimation or underestimation of truck queue length if neglecting the queue formation and queue dispersion processes. Second, by analyzing the simulation results, it was found queue formation process and queue dispersion follow different equations. The queue formation process follows logarithmic while the queue dispersion process follows exponential. The comprehensive model was proposed based on the regression analysis and named as “Simulation-based Regression State-wise Non-Stationary Model”, which fully considered three queue states: queue formation state, queue steady-state, and queue dispersion state. The flow chart for the use of the developed model are presented in Figure 7.

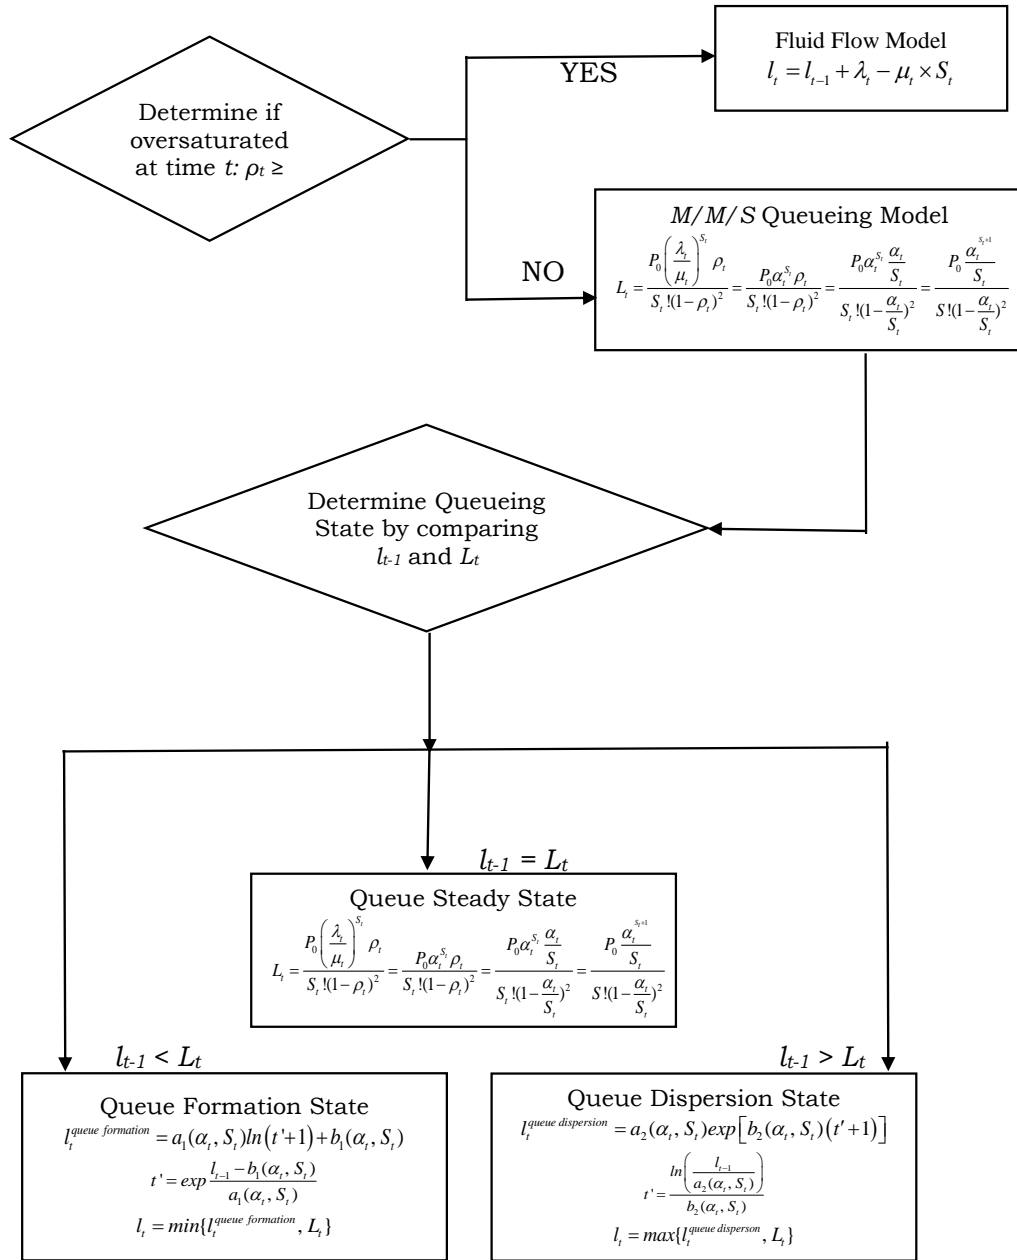


Figure 7. Model Flowchart

Chapter 4. A Case Study

In this chapter, to evaluate the model that was developed, a case study was conducted to compare the accuracy of the model with other existing methods, including the fluid flow model, the M/M/S queuing model, and the simulation-based regression model developed by Chen and Yang (2014), which is referred to as Chen (2014)'s model.

4.1 Simulation Scenario Design

A simulation-based numerical experiment was conducted to derive the simulated truck queue length at a maritime terminal where the truck arrival rate and the gate service rate vary throughout the day. It was assumed that the hourly truck arrival rate increased from 35 to 45 during the first 10 hours and decreased to 31 for the rest of the day. To compare with Chen (2014)'s model, the number of gate booths S and the service rate μ (number of trucks that can be served per hour) were set the same as in Chen (2014)'s model, i.e., $S = 2$ and $\mu = 40.8$. Therefore, the system was oversaturated during a 9-hour peak period (from 6th to 14th hour).

4.2 Case Study Results

The proposed modeling methods and the selected comparison models were applied to this case study to estimate the truck queue at the gate of this maritime terminal. The modeling results and the results of other existing models are presented in Figure 5.

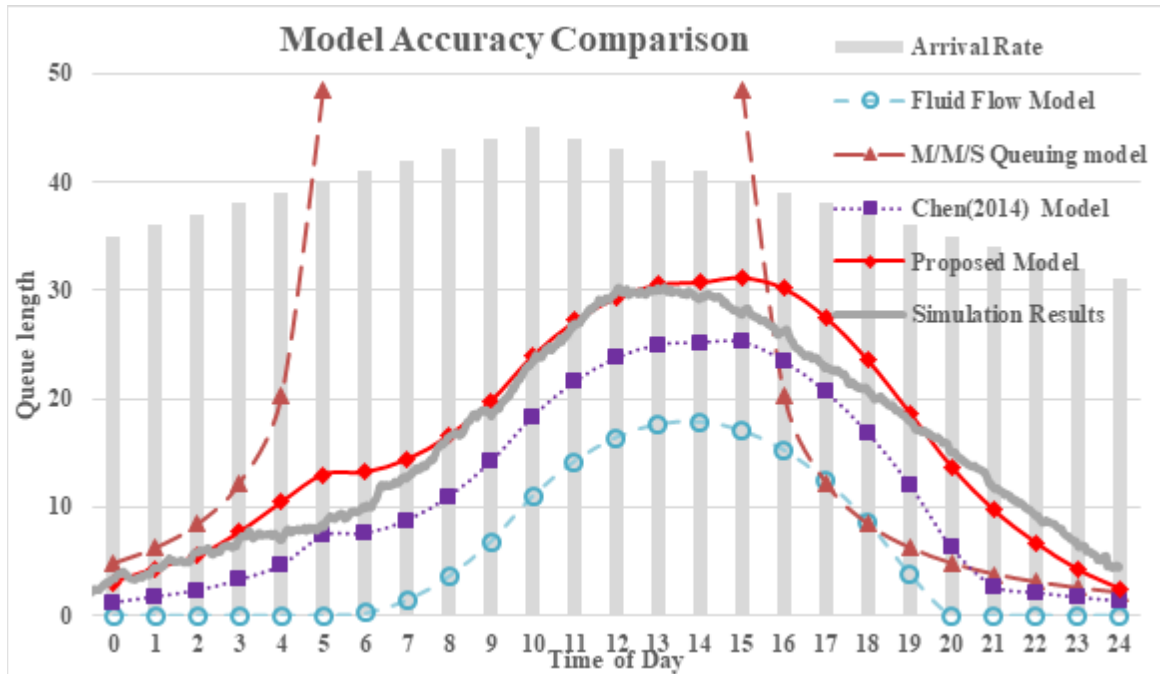


Figure 8. Estimated Truck Queue Lengths by Different Models for the Case Study

By comparing the simulated truck queue lengths with the queue lengths estimated by different models, the following key findings were obtained:

1. Overall, the proposed state-dependent approximation method outperformed the other modeling methods regarding the accuracy of the estimation. Other models either underestimated or overestimated the queue lengths.
2. The fluid flow model significantly underestimated the queue length because it neglected the random fluctuations in the arrival rate and the gate service rate.
3. The M/M/s queuing model cannot be used in the oversaturation condition ($\rho > 1$), and it significantly overestimated the queue length for the queue formation state and significantly underestimated the queue length for the queue dispersion state.
4. Chen (2014)'s model had a comparable performance during the queue formation process. However, it significantly underestimated the queue length during the queue dispersion process because this process was not considered in the model.

Discussions

The proposed modeling method can estimate the truck queue length more accurately than the other four existing methods. It is because the truck queue length needs several hours to reach its steady-state and the developed model is the only model that can take account of both the queue formation and dispersion processes. In addition to the model estimation accuracy, the proposed model is more flexible and applicable than other models. First, it can be used for both undersaturated and oversaturated situations. This new method can accurately estimate the truck queue length caused by the short-term oversaturation during peak hours. Therefore, it will be useful for assessing the effectiveness of the countermeasures that are targeted at reducing the peak-hour congestion at marine terminals. Second, since the model estimates the truck queue length based on two input variables, i.e., traffic density ($\alpha = \lambda / \mu$) and the number of gate booths (S), it can be used for marine terminals that have different numbers of gate booths and different gate services rates.

In term of the model applications, the developed model can be used for assessing the effectiveness of some countermeasures that reduce the terminal gate congestion by controlling the truck arrival rate (such as terminal appointment system), reducing the gate service time (such as using optical character recognition (OCR) technology and IT system) or increase the number of gate booths. Besides, it can be used as a sketching tool to quickly estimate the truck queue lengths to help design the scenarios for simulation-based port operation modeling. For example, the size of the buffer zone in the simulation model can be set according to the estimated truck queue lengths.

Chapter 5. Conclusions and Recommendations

In this study, a state-dependent approximation method for estimating truck queue length at marine terminals was developed to fill the gaps in the existing methods. Based on the simulation of the truck queuing system, it was found that it takes several hours for the truck queue length to reach its steady-state, and neglecting the queue formation (queue dispersion) processes will cause overestimation (underestimation) of truck queue length. To address this problem, the proposed method takes account of both the queue formation and dispersion processes into the truck queue length estimation. The model evaluation results showed that it can produce more accurate and robust estimates of the truck queue length than the existing methods. In addition, this new method can accurately estimate the truck queue length caused by the short-term oversaturation during peak hours. Therefore, it will be useful for assessing the effectiveness of the countermeasures that are targeted at reducing the peak-hour congestion at marine terminals. Furthermore, the developed model can be applied to estimate the customers' queue at any service facility in the transportation and logistic industry where the customer arrival rate and service rate vary by time and system oversaturation conditions exist during peak hours.

In this study, the proposed model was evaluated based on the simulation experiment results. In the future, field data need to be collected at the maritime terminal gates to further verify the accuracy of the developed model. In addition, more research can be conducted on the application of the developed model to optimize some operational strategies, such as the terminal appointment system, to minimize the truck queue length at the terminal gates

References

- Azab, A. E., & Eltawil, A. B. (2016). A Simulation-Based Study of the Effect Of Truck Arrival Patterns On Truck Turn Time In Container Terminals. 30th conference proceeding on Modelling and Simulation, 80–86.
- Azab, A., Karam, A., & Eltawil, A. (2020). A simulation-based optimization approach for external trucks appointment scheduling in container terminals. *International Journal of Modelling and Simulation*, 40(5), 321-338.
- Chen, G., Govindan, K., Yang, Z.Z., Choi, T.M. & Jiang, L. (2013). Terminal appointment system design by non-stationary $M(t)/E_k/c(t)$ queueing model and genetic algorithm. *International Journal of Production Economics* 146.2, 694–703.
- Chen, G. & Yang, Z.Z. (2014). Methods for Estimating Vehicle Queues at a Marine Terminal: a Computational Comparison. *International Journal of Applied Mathematics and Computer Science*, Vol. 24, No.3, 611-619. DOI: 10.2478/amcs-2014-0044.
- Chen, X., Zhou, X., & List, G.F., (2011). Using time-varying tolls to optimize truck arrivals at ports. *Transportation Research Part E: Logistics and Transportation Review* 47, 965-982.
- Derse, O., & Gocmen, E. (2018). A Simulation Modeling Approach for Analyzing the Transportation of Containers in a Container Terminal System. *International Scientific and Vocational Journal*, 2(1), 19 – 28.
- Dragović, B.; Tzannatos, E.; Park, N.K. Simulation modeling in ports and container terminals: Literature overview and analysis by research field, application area and tool. *Flex. Serv. Manuf. J.* 2017, 29, 4–34.
- Fleming, M., Huynh, N., & Xie, Y. (2013). Agent-based simulation tool for evaluating pooled queue performance at marine container terminals. *Transportation research record*, 2330(1), 103-112.
- Giuliano, G., & O'Brien, T. (2007). Reducing port-related truck emissions: The terminal gate appointment system at the Ports of Los Angeles and Long Beach. *Transportation Research Part D: Transport and Environment*, 12(7), 460-473.
- Grubisic, N., Krljan, T., Maglić, L., & Vilke, S. (2020). The Microsimulation Model for Assessing the Impact of Inbound Traffic Flows for Container Terminals Located near City Centers. *Sustainability*, 12(22), 9478.
- Green, L., & Kolesar, P. (1991). The Pointwise Stationary Approximation for Queues with Non-Stationary Arrivals. *Management Science*, 37 (1), 84-97.
- Guan, C. Q., (2009). Analysis of Marine Container Terminal Gate Congestion, Truck Waiting Cost, and System Optimization. Doctoral dissertation, New Jersey Institute of Technology.
- Huynh, N. , and C. M. Walton. 2008. "Robust Scheduling Of Truck Arrivals At Marine Container Terminals. " *Journal of Transportation Engineering* 134 (8), pp. 347-353.

- Karafa, J. Simulating Gate Strategies at Intermodal Marine Container Terminals. Master's thesis. University of Memphis, Memphis, Tenn. 2012.
- Li, N., Chen, G., Govindan, K., & Jin, Z. (2018). Disruption management for truck appointment system at a container terminal: A green initiative. *Transportation Research Part D: Transport and Environment*, 61, 261-273.
- Martonosi, S. E. (2011). Dynamic Server Allocation at Parallel Queues. *IIE Transactions*, 43(12), 863-877.
- Minh, C. C. & Huynh, N. (2017). Optimal design of container terminal gate layout. *International Journal of Shipping and Transport Logistics*, Vol. 9, No. 5., 640-650.
- Namboothiri, R., and A. L. Erera. Planning Local Container Drayage Operations Given a Port Access Appointment System. *Transportation, Research Part E*, Vol. 44, No. 2, 2008, pp. 185–202.
- Pham, Q., N. Huynh, and Y. Xie (2011). Estimating Truck Queuing Time at Marine Terminal Gates. *Transportation Research Record: Journal of the Transportation Research Board*. 2222, pp. 43-53.
- Preston, G. C., Horne, P., Scaparra, M. P., & O'Hanley, J. R. (2020). Masterplanning at the Port of Dover: The use of discrete-event simulation in managing road traffic. *Sustainability*, 12(3), 1067.
- Preston, C., Horne, P., O'Hanley, J., & Paola Scaparra, M. (2018). Traffic modelling at the Port of Dover. *Impact*, 2018(1), 7-11.
- Sharif, O., Huynh, N., & Vidal, J. M. (2011). Application of El Farol model for managing marine terminal gate congestion. *Research in Transportation Economics*, 32(1), 81-89.
- Yoon, D. (2007) Analysis of truck delays at container terminal security inspection stations. . Doctoral dissertation, New Jersey Institute of Technology.

APPENDIX

A. QUEUE FORMATION SIMULATION PROGRAM

```
myRecord = struct('list',[])

for n=1:100 (100 is the simulation run times)

lam= truck arrival time interval (Seconds), changed with different
scenarios;
u=single gate service rate (Seconds), fixed;

r1=lam;tr1=time to be simulated;
r2=lam;tr2=0;
r3=lam;tr3=0;

s1=Number of gates, changed with different scenarios;ts1= time to be
simulated;
s2= Number of gates, changed with different scenarios;ts2=0;
s3= Number of gates, changed with different scenarios;ts3=0;

R=[ r1 tr1;
    r2 tr2;
    r3 tr3];
S=[s1 ts1;
    s2 ts2;
    s3 ts3];

dddt=[];
rn=length(R(:,1));
for i=1:rn
    dt{i}=[];
end

for i=1:rn
    while sum(dt{i})<R(i,2)*60
        dt{i}=[dt{i} exprnd(R(i,1),1,1)];
    end
end

for i=1:rn
    dddt=[dddt dt{i}];
end
d=cumsum(dddt);
N=length(d);
wt=zeros(1,N);
```

```

mm=zeros(1,s1);
sn=length(S(:,1));
plf=[];

ft=exprnd(u,1,N);
f1=zeros(length(d),s1);
for i=1:s1
    f1(i,i)=1;
end
k=0;kk=0;
for i=s1+1:N

    llf=[];
    lf=zeros(1,s1);

    if d(i)>(ts1+ts2)*60
        e=find(f1(i-1,:)==2);
        for ii=1:N
            f1(ii,e)=0;
        end
    end
    for j=1:s1
        if max(f1(1:i-1,j))==0
            lf(j)=0;
        elseif max(f1(1:i-1,j))==1
            mm(j)=max(find(f1(1:i-1,j)==1));

            lf(j)=d(mm(j))+ft(mm(j))+wt(mm(j));
        elseif max(f1(1:i-1,j))==2
            lf(j)=inf;
        end

        if lf(j)==0&&k<s1-s2&&d(i)>ts1*60&&d(i)<(ts1+ts2)*60
            k=k+1;
            for ii=1:N
                f1(ii,j)=2;
            end
        end

        if lf(j)>0&&lf(j)<d(i)&&k<s1-s2&&d(i)>ts1*60&&d(i)<(ts1+ts2)*60
            k=k+1;
            for ii=1:N
                f1(ii,j)=2;
            end
        end
    end
end
end

```

```

    if lf(j)>d(i)&&k<s1-s2&&d(i)>ts1*60&&d(i)<(ts1+ts2)*60
        llf=[llf ;[lf(j) j]];
    end

end

if length(llf)~=0
    slf=sortrows(llf,1);
    if k<s1-s2
        for jj=1:s1-s2-k
            for ii=1:N
                f1(ii,slf(jj,2))=2;kk=kk+1;
            end
        end
    end
    k=k+kk;
end

if min(lf)<=d(i)
    Tn{i}=find(lf<d(i));
    a=randperm(length(Tn{i}));
    f1(i,Tn{i}(a(1)))=1;wt(i)=0;
else
    b=find(lf(:)==min(lf));
    f1(i,b)=1;wt(i)=min(lf)-d(i);
end
fff=f1(i,:);
tlf=[lf f1(i,:) d(i) ft(i) wt(i)];
plf=[plf;tlf];

end
ttts=sort([d'+ft'+wt']);
Td=[[1:N]' d'];Ts=[[1:N]' ttts];
plot(Td(:,2),Td(:,1))
title('arrival/blue+left/red')
xlabel('time/m')
ylabel('number/vehicle')
hold on
plot(Ts(:,2),Ts(:,1),'r')
tss=cumsum(S(:,2)).*60;
for i=1:3
    hold on
    plot([tss(i) tss(i)],[0 N],'g')
end
axis([0,4000,0,8000])

```

```

plot([11*60 11*60],[0 N], 'r')
Pwait=mean(wt)
stayti=[d' d'+wt' d'+wt'+ft'];

for t=1:ceil(d(end))
    L(t)=0;
    for i=1:N
        if stayti(i,1)~=stayti(i,2)&&stayti(i,1)<=t&&stayti(i,2)>=t
            L(t)=L(t)+1;
        end
    end
end
end

PTL=mean(L)

PL(1)=mean(L(1:ts1*60));
PL(2)=mean(L(ts1*60+1:(ts1+ts2)*60));
PL(3)=mean(L((ts1+ts2)*60+1:(ts1+ts2+ts3)*60));
PL
figure(2)
hold on
plot(L)
title('queue length')
xlabel('time/m')
ylabel('number/vihicle')

myRecord(n).list = L
T = struct2table(myRecord)
End

```

B. QUEUE DISPERSION SIMULATION PROGRAM

```
myRecord = struct('list',[])

for n=1:100 (100 is the simulation run times)

lam= truck arrival time interval (Seconds), changed with different
scenarios;
u=single gate service rate (Seconds), fixed;

r1=0.5*lam (Decrease the truck arrival time interval to increase the
queue length over-saturated at the first hour);tr1=1;
r2=lam;tr2=time to be simulated;
r3=lam;tr3=0;
r4=lam;tr4=0;

s1=Number of gates, changed with different scenarios;ts1= 1 (First hour
to increase the queue length over-saturated);
s2= Number of gates, changed with different scenarios;ts2=0;
s3= Number of gates, changed with different scenarios;ts3=0;
s4= Number of gates, changed with different scenarios;ts3=0;

R=[ r1 tr1;
    r2 tr2;
    r3 tr3;
    r4 tr4];
S=[s1 ts1;
    s2 ts2;
    s3 ts3;
    s4 ts4];

dddt=[];
rn=length(R(:,1));
for i=1:rn
    dt{i}=[];
end

for i=1:rn
    while sum(dt{i})<R(i,2)*60
        dt{i}=[dt{i} exprnd(R(i,1),1,1)];
    end
end
```

```

    end
end

for i=1:rn
    dddt=[dddt dt{i}];
end
d=cumsum(dddt);
N=length(d);
wt=zeros(1,N);
mm=zeros(1,s1);
sn=length(S(:,1));
plf=[];

ft=exprnd(u,1,N);
f1=zeros(length(d),s1);
for i=1:s1
    f1(i,i)=1;
end
k=0;kk=0;
for i=s1+1:N

    llf=[];
    lf=zeros(1,s1);

    if d(i)>(ts1+ts2)*60
        e=find(f1(i-1,)==2);
        for ii=1:N
            f1(ii,e)=0;
        end
    end
    for j=1:s1
        if max(f1(1:i-1,j))==0
            %TTn{i}=[TTn{i} j];
            lf(j)=0;
        elseif max(f1(1:i-1,j))==1
            mm(j)=max(find(f1(1:i-1,j)==1));

            lf(j)=d(mm(j))+ft(mm(j))+wt(mm(j));
        elseif max(f1(1:i-1,j))==2 %==2
            lf(j)=inf;
        end

        if lf(j)==0&&k<s1-s2&&d(i)>ts1*60&&d(i)<(ts1+ts2)*60
            k=k+1;
            for ii=1:N
                f1(ii,j)=2;
            end
        end
    end
end

```

```

    end
end

if lf(j)>0&&lf(j)<d(i)&&k<s1-s2&&d(i)>ts1*60&&d(i)<(ts1+ts2)*60
    k=k+1;
    for ii=1:N
        f1(ii,j)=2;
    end
end

if lf(j)>d(i)&&k<s1-s2&&d(i)>ts1*60&&d(i)<(ts1+ts2)*60
    llf=[llf ;lf(j) j];

    %llf=[llf j]
end

end
if length(llf)~=0
    slf=sortrows(llf,1);
    if k<s1-s2
        for jj=1:s1-s2-k
            for ii=1:N
                f1(ii,slf(jj,2))=2;kk=kk+1;
            end
        end
    end
end
k=k+kk;
end

if min(lf)<=d(i)
    Tn{i}=find(lf<d(i));
    a=randperm(length(Tn{i}));
    f1(i,Tn{i}(a(1)))=1;wt(i)=0;
else
    b=find(lf(:)==min(lf));
    f1(i,b)=1;wt(i)=min(lf)-d(i);
end
fff=f1(i,:);
tlf=[lf f1(i,:) d(i) ft(i) wt(i)];
plf=[plf;tlf];

%if i==301 break;end;
end
ttts=sort([d'+ft'+wt']);
Td=[[1:N]' d'];Ts=[[1:N]' ttts];

```

```

%subplot(1,2,1)
plot(Td(:,2),Td(:,1))
title('arrival/blue+left/red')
xlabel('time/m')
ylabel('number/vehicle')
hold on
%subplot(1,2,2)
plot(Ts(:,2),Ts(:,1),'r')
tss=cumsum(S(:,2)).*60;
%plot(wt)
Pwait=mean(wt)
stayti=[d' d'+wt' d'+wt'+ft'];

for t=1:ceil(d(end))
    L(t)=0;
    for i=1:N
        if stayti(i,1)~=stayti(i,2)&&stayti(i,1)<=t&&stayti(i,2)>=t
            L(t)=L(t)+1;
        end
    end
end
end

PTL=mean(L)

PL(1)=mean(L(1:ts1*60));
PL(2)=mean(L(ts1*60+1:(ts1+ts2)*60));
PL(3)=mean(L((ts1+ts2)*60+1:(ts1+ts2+ts3)*60));
PL
figure(2)
hold on
plot(L)
title('queue length')
xlabel('time/m')
ylabel('number/vihicle')

myRecord(n).list = L
T = struct2table(myRecord)
end

```